


APPLICATION INSTRUCTIONS

- 1 Twist off the cover of the bottle.
- 2 According to the grout gap, cut the mouth of the nozzle.
- 3 Fix the nozzle to the bottle.
- 4 Load the bottle into the caulking gun.
- 5 Remove all foreign and excessive adhesive from the grout gap, preferably using a vacuum cleaner.
- 6 Squeeze about 30 cm in volume of the sealant from the nozzle tip and discard.
- 7 Squeeze the grout into the tile gap.
- 8 Repeat the same if required.
- 9 Use the ball shape to press into the grout gap.
- 10 Keep for approximately 16 hours.
- 11 Remove the excess grout with the blade scraper.
- 12 Use the masking tapes or wax along the tile edges for rough tiles before grouting.

Required tools

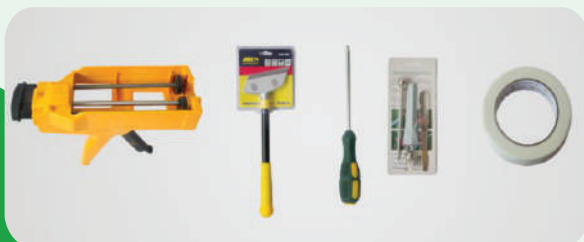

COLOUR CHART

High Quality Imported Pigments, with beautiful and shiny colours that have a visible effect.

1 Pearl White	2 Ivory White	3 Champagne Gold
4 Ivory Gold	5 Shiny Gold	6 Ocean Blue
7 Royal Blue	8 Sapphire Blue	9 Moonlight Silver
10 Light Grey	11 Pearl Black	12 Goma Green



Imported cosmetic grade pigment, no colour-fading.



Swisstek tile sealant is chemical resistant, dirt resistant and wear resistant.



No harm to family health, eco-friendly raw material, emits no odour.



Swisstek tile sealant is waterproof, anti-mildew and avoids bacteria.

Marketed and Distributed by **SWISSTEK (CEYLON) PLC** FACTORY

Factory Complex, Belummahara, Imbulgoda.
Telephone (General) - 033 4930590 /
033 4944441 / 033 4944442
Fax - 033 2260406 / 033 5701371
E-mail - swisstek@lankatiles.com
Website - www.swisstekceylon.com

(A subsidiary of Lanka Walltiles PLC)

LANKATILES
The Fine Art of Living

SWISSTEK®

TILE SEALANT

(EPOXY TILE GROUT)



For the perfect finish

PRODUCT INGREDIENTS

Swisstek Tile Sealant is made up of two main components, epoxy resin and hardener, which are mixed with a high quality pigment sealant.

Swisstek Tile Sealant is produced with the most advanced technology, to seal gap joints between tiles and to add beauty to your home.



SPECIFICATIONS AND PACKING

Double tube : 400ml/Pair and 20pcs/Carton
Size : (37 x 24 x 24) cm
Weight : 540 Grams (Gross)

TECHNICAL DATA OF SWISSTEK TILE SEALANT

Colour	Curing Time (25°C)	Shear Strength	Temperature	Shelf Time
Part A: 12 colours	4 hours for dry surface, 16 hours to dry completely.	≥12 MPa	- 60° to +100°	24 months



RANGE OF APPLICATIONS



Coverage Data (sq. ft.)

Width of groove (mm)	1	1.5	2	2.5	3	4	5
Size of ceramic tiles							
800*800mm	274	228	213	153	138	108	86
400*800mm	205	172	161	114	99	88	75
600*600mm	205	172	161	114	99	86	73
500*500mm	172	143	135	96	82	67	54
300*600mm	154	129	118	85	67	62	45
400*400mm	138	114	108	76	62	52	41
300*300mm	102	86	81	58	45	39	30
200*200mm	69	58	54	38	30	30	22
100*100mm	34	29	27	19	17	13	11
50*50mm	17	14	12	9	8	7	5

CUSTOMER USES

